



INSTRUCTIONS FOR E-Z UP® Value Sidewall

WHAT'S IN THE BOX


(1) 10' E-Z UP® Value Sidewall

SIDEWALL SET UP

1. Completely set up your E-Z UP® shelter in the area that you intend to shade according to the owner's manual instructions. Be sure to leave the leg height adjustment on the 1st setting.
2. Attach sidewall to frame as shown. (A) Attach **Quick Attachment Truss Clips** around the top truss as shown.
3. Wrap **Quick Attachment Hook-and-Loop Straps** around the legs of the shelter. (B) Press straps into pad firmly. Enjoy your sidewall-equipped shelter.
4. To get optimal sidewall coverage, set frame legs to the middle adjustment hole/setting.

Note:

- The top of the sidewall tucks under the valance of the fabric top.
- All professional E-Z UP® sidewalls have zippers on both sides to fully enclose your shelter with four sidewalls if desired.
- To ensure proper sidewall fit, slightly position legs inward and then attach sidewalls. Walls should be attached BEFORE frame is staked or secured down.

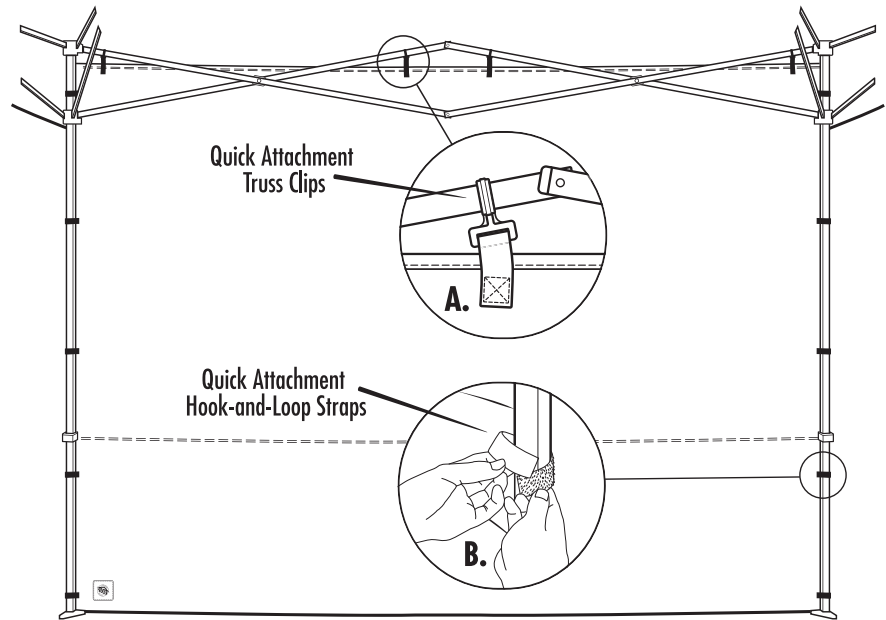

Sidewall Care:

Use a mild soap (not detergent) and plenty of water for cleaning. Let the top, frame, and sidewalls dry completely before closing or storing to avoid mildew.

Important Information:

- Always stake or weigh down your shelter. Do not use in any potentially windy or rainy weather. Wind and rain can damage the product and may also result in injury to you or others. Therefore, do not rely on shelter for protection in heavy or prolonged rain storms.
- The product is designed as a temporary shelter. Do not leave up for extended periods.
- Use caution when handling the folding frame. Avoid pinching hands or fingers as frame opens or closes.
- Do not use shelter in a lightning storm.
- Do not leave your product unattended.
- Do not build fires within shelter enclosure.

© Copyright 2022 International E-Z UP, Inc. USA. All rights reserved.

INTERNATIONAL E-Z UP, INC.
1900 Second St. Norco, California 92860

800-45-SHADE

The #1 Instant Shelter® Brand in the World

ezup.com